


SPC FLOORING FOR NEXT GENERATION



TILE
MATRIX
THE TILES HUB

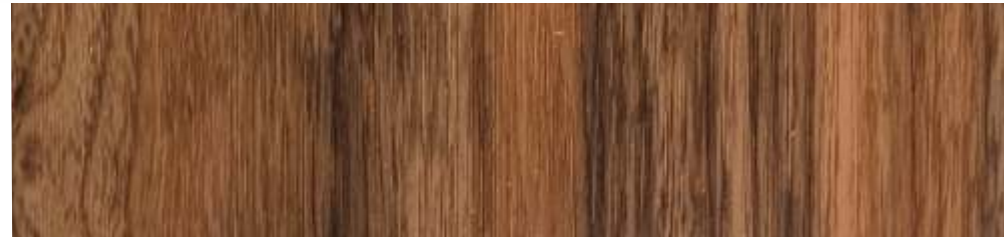

SPC88003-1



SPC88003-3



SPC88004-2



SPC88004-5



SPC88004-2



SPC88004-6



SPC88004-4



SPC88007-1

SPC FLOORING FOR NEXT GENERATION

PLANK SIZE : 7.25" X 48"
 WEAR LAYER : 0.3 MM
 APPROX WEIGHT: 0.800 KG PER SQ. FT

- 100% WATER PROOF
- FIRE RETRIED
- ANTI STARCH
- ANTI SLIPPERY



SPC88022-6



SPC88023-3



SPC88023-5



SPC88025-5



SPC88026-1



SPC88026-6



SPC99001-4



PLANK SIZE : 7.25" X 48"
 WEAR LAYER : 0.3 MM
 APPROX WEIGHT: 0.800 KG PER SQ. FT

- ELECTRIC CURRENT RESISTANCE
- 100% FORMALDEHYDA FREE
- ANTI BACTERIAL
- ECO FREINDLY



SPC88007-3



SPC88008-1



SPC88009-1



SPC88009-4



SPC88021-1



SPC88021-6



SPC88022-2



SPC88022-3

Advantage of Polyleaf SPC Flooring:

1) Waterproof and Dampproof

As the main component of SPC is stone powder, so it performs well with water, and mildew will not happen with high humidity.

2) Fire Retardant

According to the authorities, 95% of the victims were burned in the fire caused by the toxic fumes and gases. The fire rating of SPC flooring is NFPA CLASS B. Flame retardant, not spontaneous combustion, leave the flame automatic out in 5 seconds, won't produce toxic or harmful gases.

3) No Formaldehyde

Polyleaf SPC is high quality stone powder & PVC resin, without harmful material such as benzene, formaldehyde, heavy metal.

4) No Heavy Metal, No Lead Salt

The Stabilizer of Polyleaf SPC is Calcium zinc, no lead salt heavy metal

5) dimensionally Stable

Exposed to 80° heat, 6 hours—Shrinkage ≤ 0.1%; Curling ≤ 0.2mm

6) High Abrasion

Polyleaf SPC flooring has a transparent wear-resisting layer, whose revolution is up and higher than 10000 turns.

7) Superfine Anti-slipping

Polyleaf SPC flooring has special skid resistance and wear-resisting layer of the floor. Compared with common floor, SPC flooring has higher friction when it's wet.

8) Low requirement of subfloor

Compared to traditional LVT, SPC flooring has a distinct advantage because it is rigid core, which can hide many imperfections of subfloor.

| | | | |
|---|--|---|--|
|  | 100% RECYCLABLE |  | IMPACT RESISTANCE Thick wear layer providing lasting quality |
|  | EASY CLEAN+STAIN RESISTANCE Anti-spill & easy to remove existing stain |  | ACOUSTIC FRIENDLY Reduce sound by more than 50% |
|  | UV COATED Colour does not fade under sunlight |  | QUICK.FIT EASY CLICK DESIGN Easy to install on flat surface or tiles |
|  | ANTI-SLIP Slip resistance |  | SCRATCH+WEAR RESISTANCE Thick wear layer with double UV coating |
|  | NON-TOXIC+ODOURLESS No smell & not hazardous to health |  | FIRE RESISTANCE B1 Level : Hard to burn |
|  | WATERPROOF highly resistance to water & moisture |  | ELECTRIC CURRENT RESISTANCE Does not conduct electricity |
|  | INSECT PROOF Insect free due to composition of material |  | 100% FORMALDEHYDE FREE Free from toxic chemical and toxic gas |






Flooring Specifications

| | |
|------------------------|-----------------------------------|
| Plank Size | 7.25" x 48", 12" x 24" |
| Thickness – Wear Layer | 4.0mm – 0.3/0.5 & 5.0mm – 0.3/0.5 |
| PVC Grade | 100% Virgin |
| UV Coating | 2 layer |
| Printed film layer | 0.07 |
| Installation Type | Click Lock |
| Acoustic Backing | No Backing / EVA / IXPE |
| Fire Retardant Rating | B1 Grade |
| Minimum Order Quantity | 1*20'GP FCL Container |
| Per box | 10 Planks |
| Per Box wt. | 20 kg Approx |
| Product Origin | INDIA |

Benefits of Buying SPC Rigid Core From Us

VIRGIN PVC FOR EACH PLANK

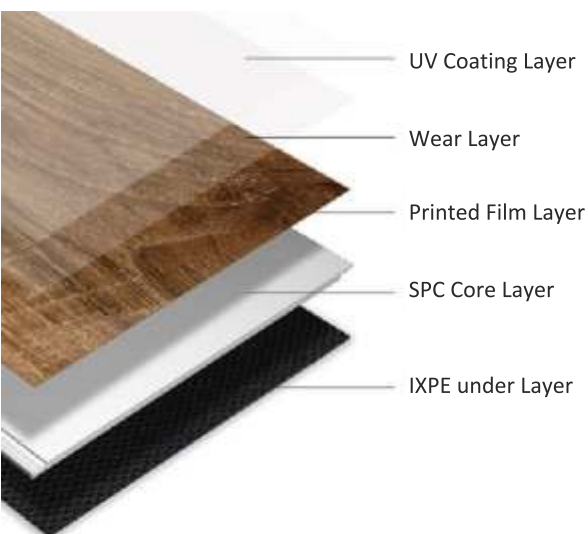

SPC FLOORING FOR NEXT GENERATION



TILE
MATRIX
THE TILES HUB

+1 305 338 6621

sales@tilematrix.com

www.tilematrix.com

